



Vienna Symphonic Library PC Setup Guide for HALion

Overview

The Vienna Symphonic Library is a comprehensive sample library, containing thousands of articulations and playing techniques for all featured instruments. It is divided into 2 major components:

- 1. Single Note Samples**, featuring playing techniques from staccato to sustained notes, tremolos, trills, dynamics, and much more.
- 2. Performance Instruments**. These need the famous **Performance Tool** to work properly. The Performance Tool is the key to authentic **Legato** lines and **Repetitions**.

All instruments which have a “perf” in their name (such as, e.g., VI-perf-leg_f) NEED the Performance Tool.

The Performance Tool's powerful **Alternation** Mode automatically switches between the different playing techniques or variations of so-called “Combination Instruments”.

The mixture of these 2 components is what makes your music come alive, and it's up to YOU to choose the right articulation for your arrangement.

There are **two methods** of implementing the Performance Instruments of the Vienna Symphonic Library in conjunction with **HALion2**. We refer to those methods as **“Live” Mode** and **“Monitor” Mode**.

We strongly recommend all HALion2 users to upgrade to HALion3, mainly because of two reasons:

The **RAM-save function in HALion3** adds a new dimension to your sample management. It makes your work with the Vienna Symphonic Library much more efficient and economic!

HALion3 also works as a **stand-alone sampler**. If your soundcard is a multichannel device, the stand-alone mode will facilitate your work regarding Performance Instruments. Please have a look at the third method, the “Stand-alone” Mode.



Installation

First register your Vienna Symphonic Library Horizon Series product and download the HALion programs (.fxp files) from the User Area of our website www.vsl.co.at/user.


Then double-click on the folder “Exs” on your DVD, open the “Samples” folder and extract the files to your hard disk. You do not have to extract the “Sampler Instruments” folder, as this contains only EXS-specific files.

The files on your DVDs are packed as self-extracting files. To extract them on a PC, simply double-click on a file and specify the target folder. You can also use WinRar (included on your DVD) to extract single files.

2

Sample Management in HALion2

After starting HALion2 (V 2.035), click on the Keyzone Button below. Then simply right-click the Halion logo at the top. Choose “Select the HALion Content Folder...” in the menu.

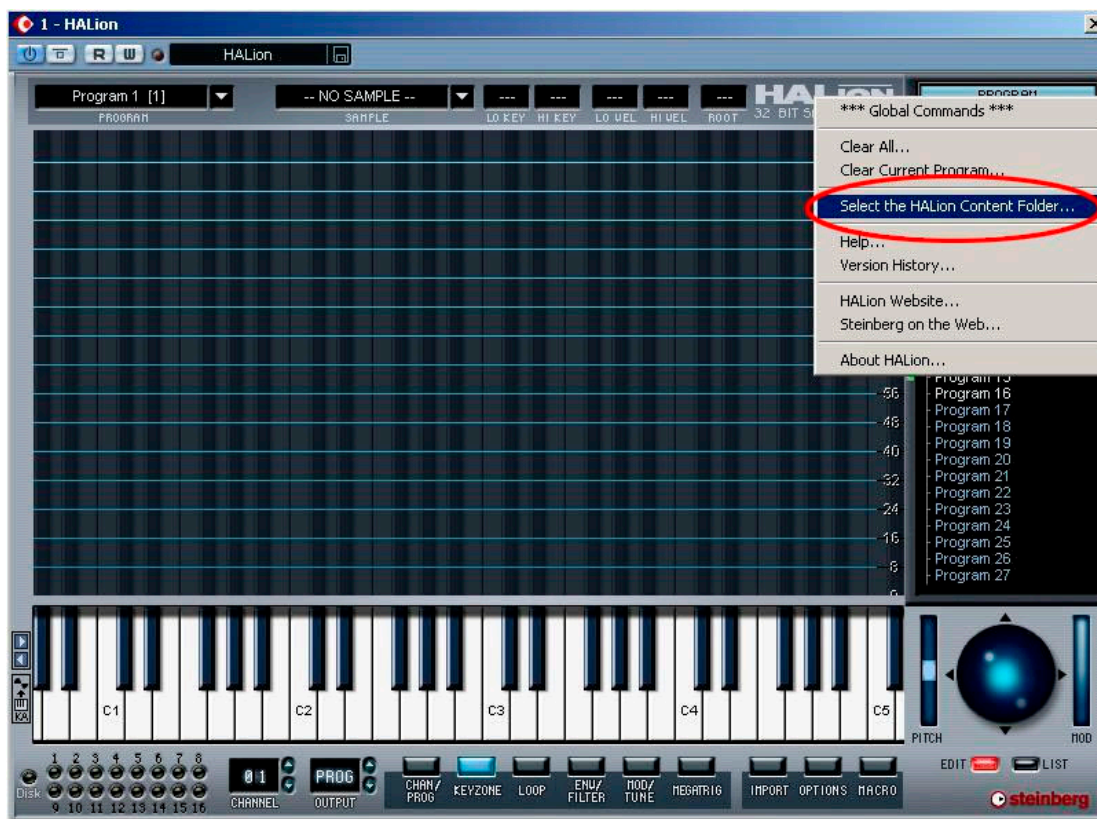

Assign the folder you extracted your .wav files to. From now on, HALion will always search this folder first.



When loading an instrument, a message may appear that some samples could not be found:



3

In that case, simply right-click the HALion logo again and select “Search in directories”. Then assign the folder in which your Samples are stored.

Important: The best way to speed up loading times in HALion2 is to store each program again after your loading process is completed by overwriting the old .fxp file. This way Halion2 will always know where to find the corresponding samples for each program.

Attention HALion2 users:

If you load a program with **Switchkeys** in **HALion2** (combinations), you have to trigger a Switchkey before you play a note. Otherwise you won't hear anything.

When you play a note **outside of the range of your loaded instrument** (not a switchkey!) and you don't hear anything, please **retrigger the Switchkey** for the articulation you want to play and everything will work fine again.




Sample Management in HALion3

Use the Auto Browse Function in **HALion3**. Highlight the correct file formats at the top of the Browser page.

You need **.wav**, **.fxp** (program) and **.fxb** (bank) files.

Select the hard disk or the folder containing the .wav files and the .fxp files. Then click on **“Auto Browse”**. The **“Auto Browse”** function scans all selected directories for **HALion** compatible files.

4

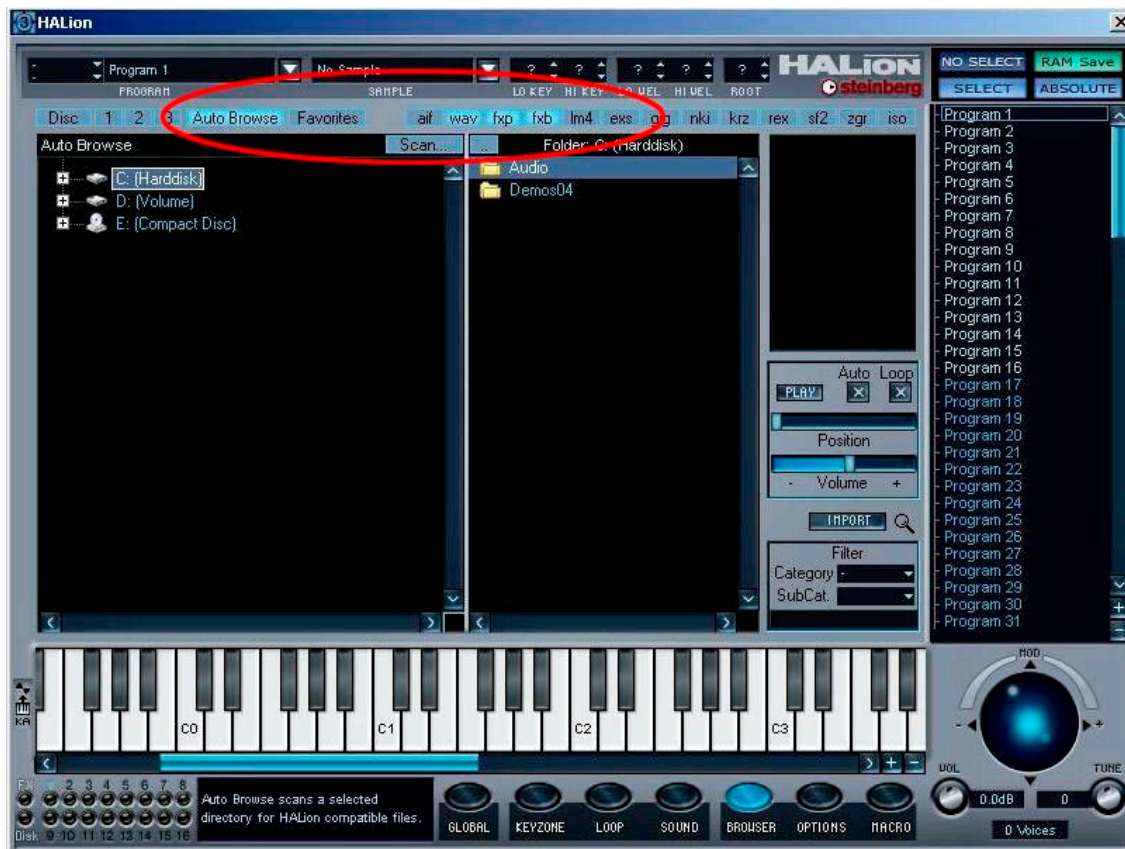

RAM Save

In HALion3, you will find the RAM Save function (in the upper left corner) to be very useful, as it unloads all the samples you did not use in your arrangement after a complete run through your composition. This way you can increase the loading capacity of your HALion3 significantly!

For more information on the RAM Save function and HALion3 in general, please look up your HALion3 manual.



Integrating the Performance Tool

The Performance Tool needs **virtual MIDI Ports** to receive and output MIDI Data from and to your sequencer. Please download the free **VSL MIDI Router** from www.vsl.co.at/user as the connecting virtual MIDI cable from your sequencer to the input of your Performance Tool, and **Maple Virtual MIDI Cable** – available for free on www.marblesound.com – to connect the output of your Performance Tool with your HALion.

5


1. Live Mode

Background

This tutorial shows how to play and record a live performance (i.e., playing directly from a MIDI keyboard) in your sequencer using the Vienna Symphonic Library's Performance Tool in **Legato Mode** and HALion as a VST-instrument.

In Live Mode, it is not possible to edit your recorded legato line, as the MIDI data the Performance Tool produces is rather complicated!

The diagram below depicts the high level setup for this approach:

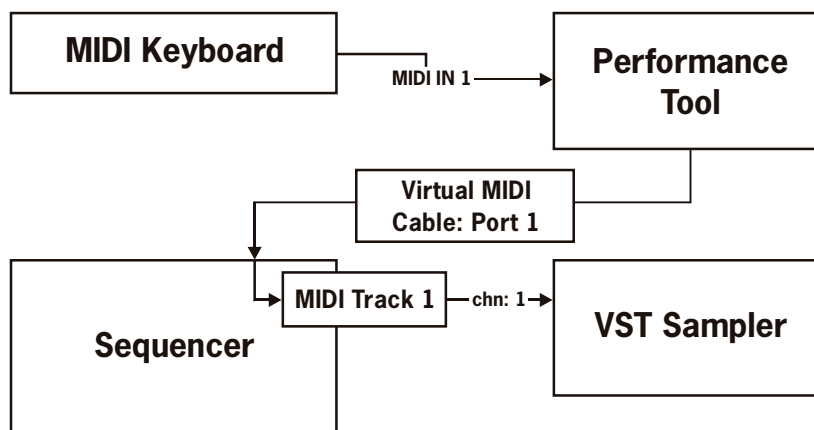

This is the simplest approach to using the Performance Tool with HALion when recording or performing your live performance with HALion. But as your sequencer records all the modified MIDI data coming from the Performance Tool when using Performance instruments, it will be hard (if not impossible) to edit your performance on the MIDI level.



Getting Started


- Create a new blank project in your sequencer.
- Load up HALion as a VST instrument.
- Load a Performance Legato program into the first channel of HALion (in this tutorial we use the Performance Legato Clarinet KLB_perf_leg_f). Use **“Load Instrument”** in the File pop-up menu to load a single program.

6




Configuring the Performance Tool


Launch the Vienna Symphonic Library Performance Tool to configure the **MIDI In-Port**, **MIDI Out-Port** and the **Performance Mode**.

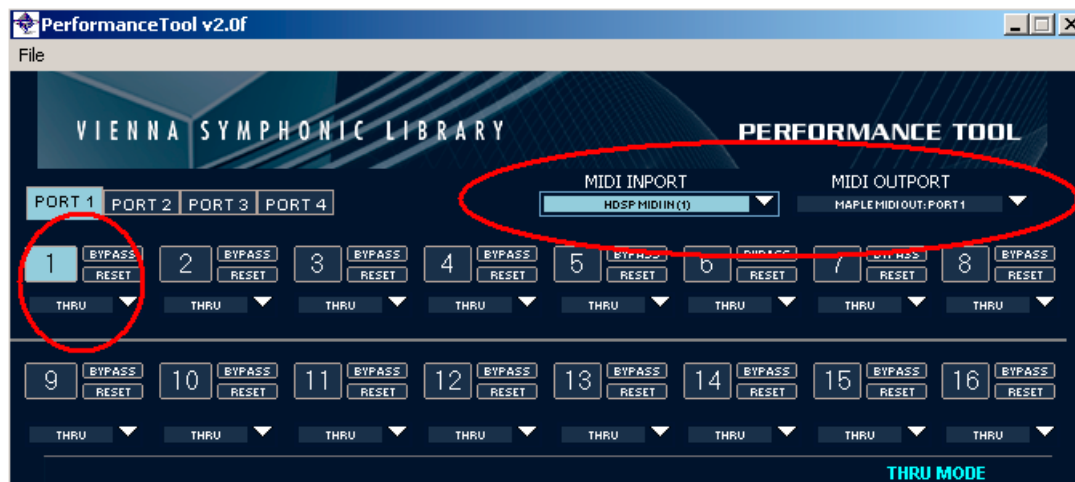

This setup depends very much on the setup you are using. The MIDI In-Port has to be the MIDI port where the data from your keyboard come in (in this case HDSP MIDI In). For the MIDI Out-port select the first port of your virtual MIDI ports (here: “Maple MIDI Out: Port1”).




Finally, select “Hor-Legato” Mode (for the Horizon Series) for the channel into which you loaded a Performance Instrument in your sampler (in this case channel 1).

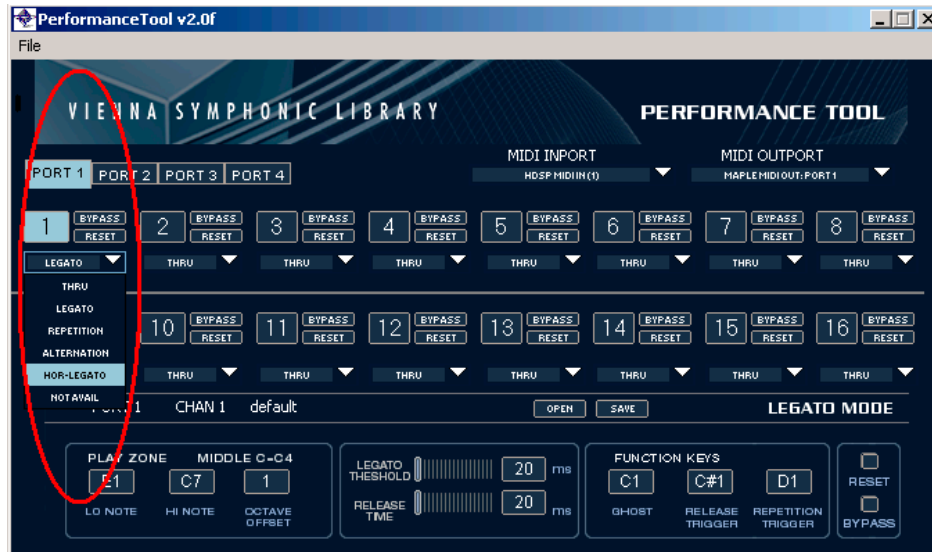

7


Legato Mode should also be configured with the appropriate Tool Template file (.pal), in this example **KLB_perf-leg.pal**. Download the **Tool Templates** for your purchase from our website www.vsl.co.at/user. Click “open” and select the right .pal file from your Tool Templates folder.

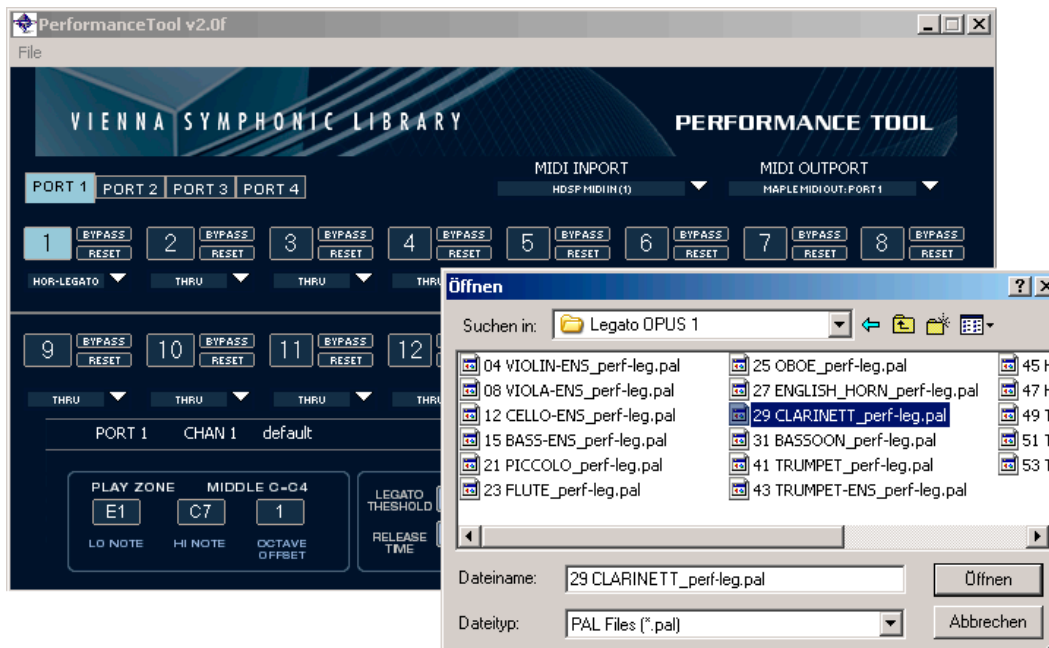



Configuring the Sequencer

Add a new MIDI track in your sequencer (in this case Cubase SX) and configure it to accept inputs from the Performance Tool Out-Port (in this case Maple MIDI in: Port 1) and output its data to HALion.

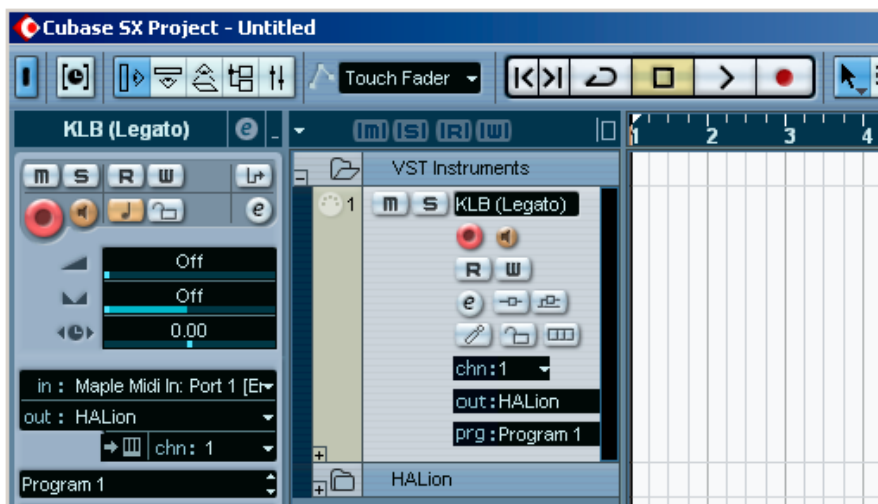

8

Now prepare the MIDI track for playback and/or record and start playing your Performance Legato Instrument. When you play back your recorded passage, the Performance Tool will not be an active part of the MIDI chain.

Exporting to Wave Files

If you want to capture your performance as a wave file, you can easily export an audio mixdown of your instruments (just as with any other VST plugin).



2. Monitor Mode


Background

This tutorial shows how to record a live performance and maintain the original source (for editing purposes) in your sequencer using the VSL Performance Tool's Legato Mode, with your HALion as a VST-instrument.

9

In this mode, you record your melody on a "Source" Channel and by routing your MIDI data through the Performance Tool, you trigger the Performance Instrument loaded into your HALion through a second "Output" channel. This way, you can easily edit your melody in the "Source" channel, and when you are satisfied with the result, you simply record the MIDI data the Performance Tool produces to your "Output" channel.

The high level design for this approach is depicted below:

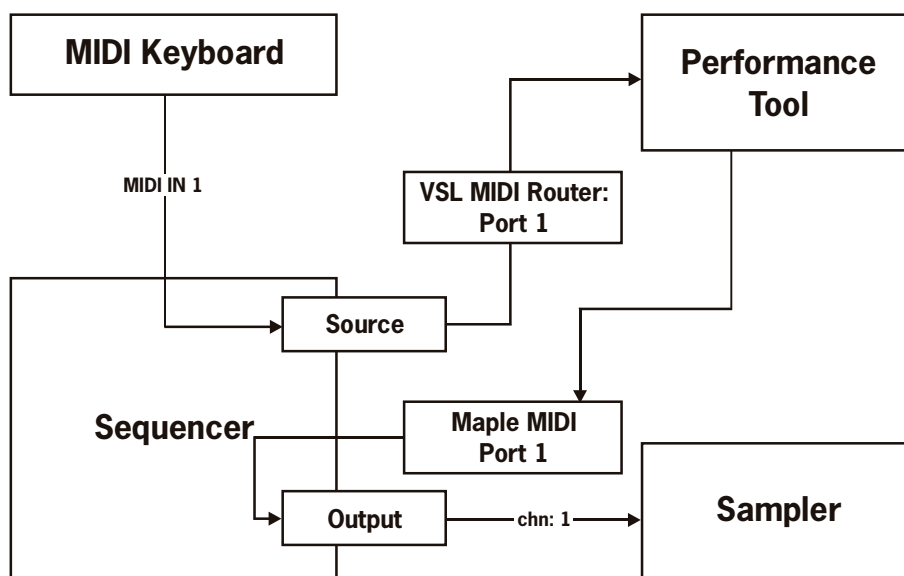

Getting Started

- Create a new blank project in your sequencer.
- Load up HALion as a VST instrument.
- Load a Performance Legato program into the first channel of HALion (in this tutorial we use the Performance Legato Clarinet **KLB_perf_leg_f**). Use "Load Instrument" in the File pop-up menu to load a single program.






Configuring the Performance Tool


Launch the VSL Performance Tool and configure the In-Port, Out-Port and the Performance Mode.

The In-Port should be configured to receive data from a virtual MIDI Port (in this case VSL MIDI Router: In1) whereas a second virtual MIDI Port (Maple MIDI Out: Port 1) is used for the output.

10

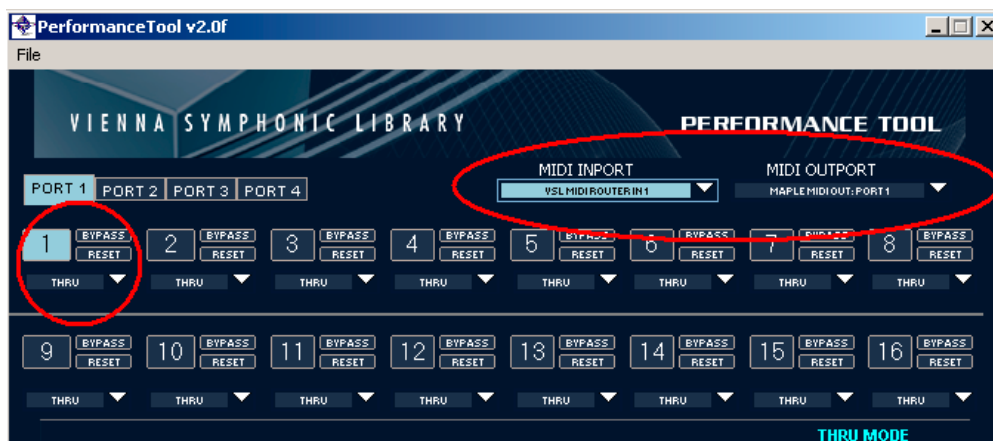


Finally, select “Hor-Legato” (for the Horizon Series) on the channel into which you’ve loaded a Performance Instrument in your sequencer (in this case channel 1).

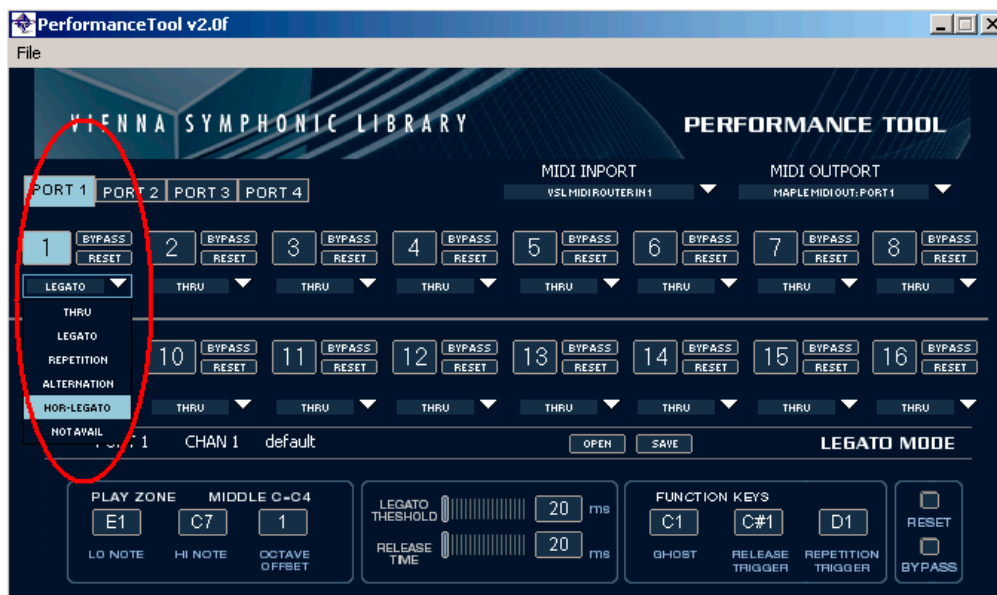



Legato Mode should also be configured with the appropriate Tool Template file (.pal), in this example **KLB_perf-leg.pal**. Download the Tool Templates for your purchase from our website www.vsl.co.at/user. Click “open” and select the right .pal file from your Tool Templates folder.

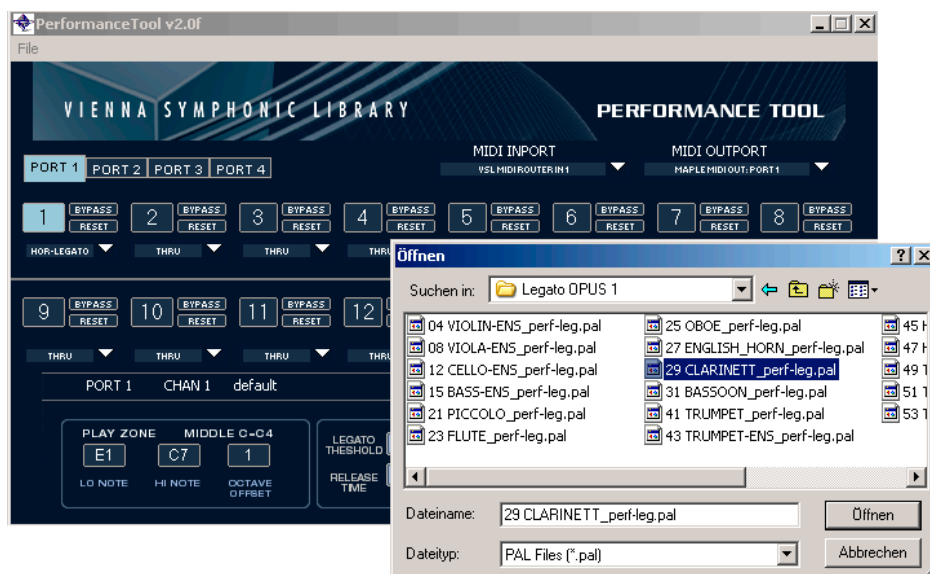

11


Configuring the Sequencer

Add four new MIDI tracks in the sequencer (in this case Cubase SX).

Two tracks will be used for recording source and Performance data (call them **Source** and **Output**). The other two tracks (which should be named after the instrument) are used for holding the instrument's specific data.

This may seem like overkill – but unfortunately, this approach is required as Cubase MIDI tracks receive on all 16 Channels at once, so that it is impossible to route the Performance Tool outputs on channel level. If this was possible, naturally there would be no need for the Source and Output tracks.

The MIDI Track **Source** should be configured to accept inputs from your MIDI Keyboard (in this case HDSP MIDI In 1) and output to the Performance Tool In-Port (here VSL MIDI Router: Out 1).

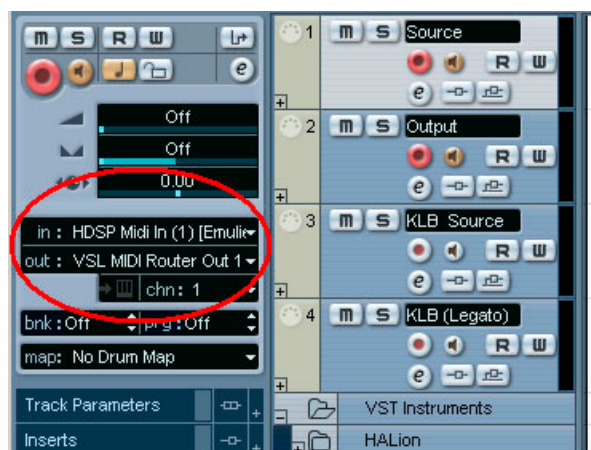



The **Output** Midi Track should be configured to accept inputs from the Performance Tool Out-Port (in this case Maple Midi In: Port 1) and output its data to HALion.



12

Now prepare **both Source and Output MIDI tracks** for playback and/or record and start playing your Performance Legato Instrument.


Record some MIDI Data on both tracks at the same time. Of course you can also wait with the recording of your **“Output”** track until all the editing you find necessary is done.

Using Source and Output

Once you have some data in the Source and Output tracks, it can be moved down into the **KLB_Source** and **KLB (Legato)** MIDI Tracks.

The **KLB_Source** MIDI track should be configured without any inputs or outputs (i.e. “Not Connected”) as shown below. This is basically a track with no purpose other than allowing you to edit your music at a future time if necessary. Don’t forget to assign the **KLB (Legato)** to Halion’s Midi channel which holds the instrument.





The **KLB (Legato)** MIDI track should be configured without any inputs but with its output set to **HALion**.



13

This is the track that will actually “play”, using the MIDI data generated by the Performance Tool. This data gets sent to **HALion**. If you want to edit your source data (your melody), do so in the **Source** track (**don’t forget to choose the right MIDI channels!**) and simply record the output data of the Performance Tool once more.

Exporting to Wave Files

If you want to capture your performance as a wave file, you can easily export an audio mixdown of the **Output** channel connected to **HALion**.



3. Stand-alone Mode (HALion3 only!)


Background

14

This mode shows you how to use HALion3 as a stand-alone application in conjunction with the Performance Tool. This way your recorded MIDI data will be sent to your HALion3. Please remember to save the setup you are using in HALion3 separately, as it will NOT be saved with the arrangement in your sequencer. Also, don't forget to save your Performance Tool settings!

To record the audio data in your sequencer from your stand-alone HALion3 on ONE computer you either need a multiclient soundcard, and you will have to use your soundcard's physical outputs and inputs (digital or analog) to record the signal by sending it through your audio mixer.

The setup for this approach is very simple:




Always make sure that you send your MIDI data to the right port in your sequencer, so that the Performance Tool can send the modified MIDI data to your sampler. Please look up your Performance Tool Manual for more details.

If you are using **HALion3 on a dedicated machine**, we suggest using **MIDI over LAN** (available at www.soundlab.com) to send the MIDI data from your sequencer to the Performance Tool on your second (HALion3) computer.

Getting Started

- Create a new blank project in your sequencer.
- Load up **HALion3** as a stand-alone application.
- Load a Performance Legato program into **HALion3** (in this tutorial we use the Legato Clarinet **KLB_perf_leg_f**).

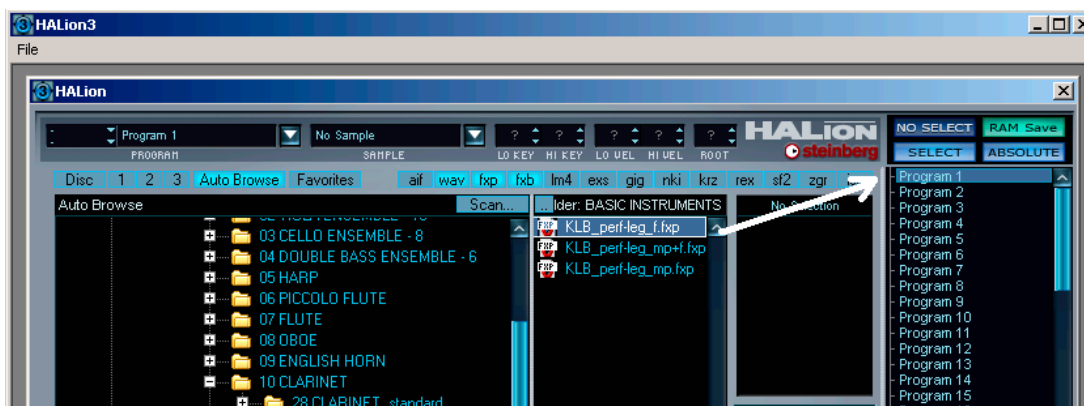




Configuring the Performance Tool

Launch the Vienna Symphonic Library Performance Tool to configure the **MIDI In-Port**, **MIDI Out-Port** and the **Performance Mode**.


15

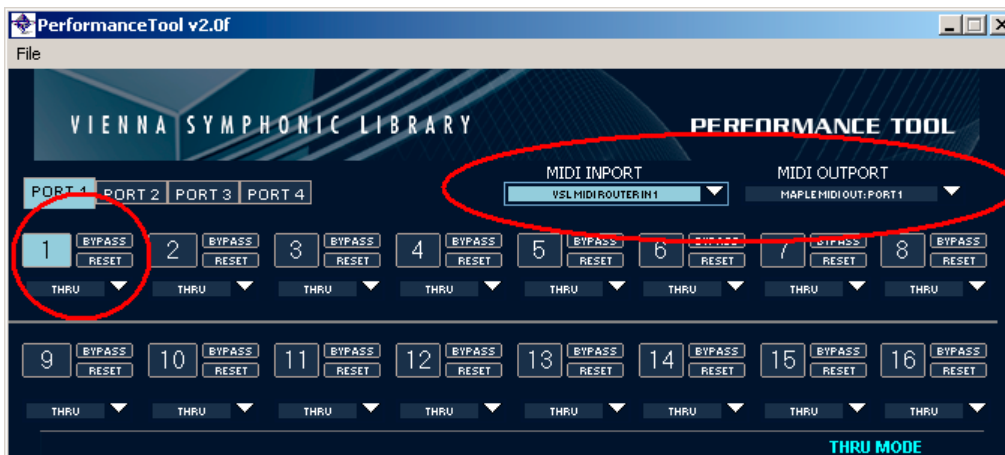


This setup depends very much on the setup you are using. The MIDI In-Port has to be the MIDI port where the data from your sequencer comes in (in this case VSL MIDI Router: In 1). For the MIDI Out-port select the port you chose as your MIDI Inport for your **HALion3** (in this case Maple MIDI Out: Port 1).

Finally, select **“Hor-Legato” Mode** (for the Horizon Series) for the channel into which you've loaded a Performance Instrument in your sampler (in this case channel 1).






Legato Mode should also be configured with the appropriate Tool Template file (.pal), in this example KLB_perf-leg.pal. Download the Tool Templates for your purchase from our website www.vsl.co.at/user. Click “open” and select the right .pal file from your Tool Templates folder.

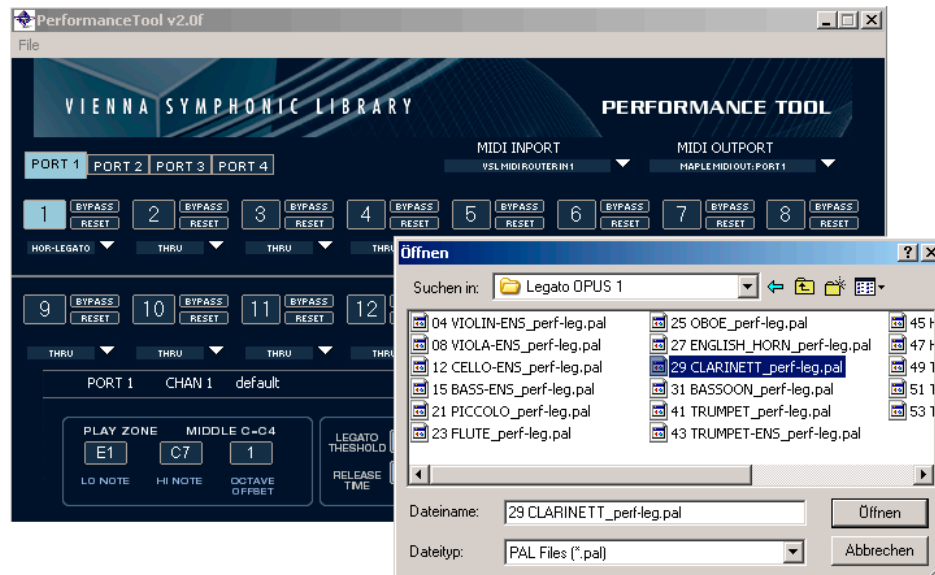

16

Configuring the Sequencer

Add a new MIDI track in your sequencer (in this case Cubase SX) and configure it to accept inputs from your keyboard (in this case HDSP MIDI IN 1) and output its data to the port you assigned as your MIDI In Port in the Performance Tool (VSL MIDI Router: Out 1).

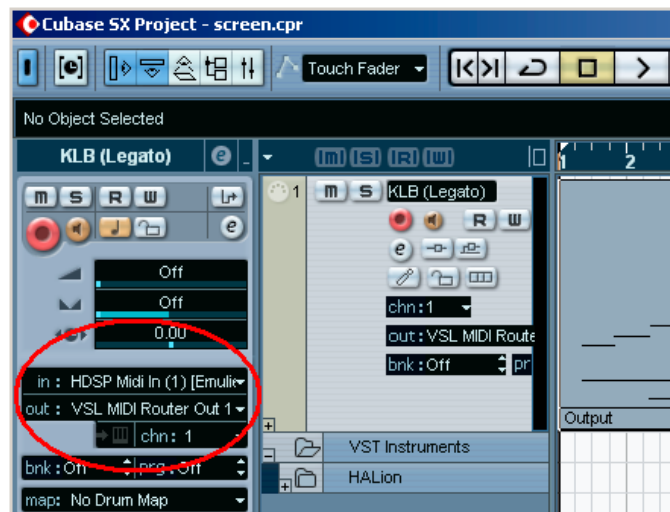

Now prepare the MIDI track for playback and/or record and start playing your Performance Legato Instrument.




Exporting to Wave Files

Make sure to set the Preferences (in the pop-up “File” menu) to the correct settings concerning the **ASIO Device**, **Outputs** and **MIDI Input** (in this case Maple MIDI In Port 1).

To record audio data from your HALion3 you need to send the signal through a hardware mixer! Then send the signal to any input of your sequencer.

17

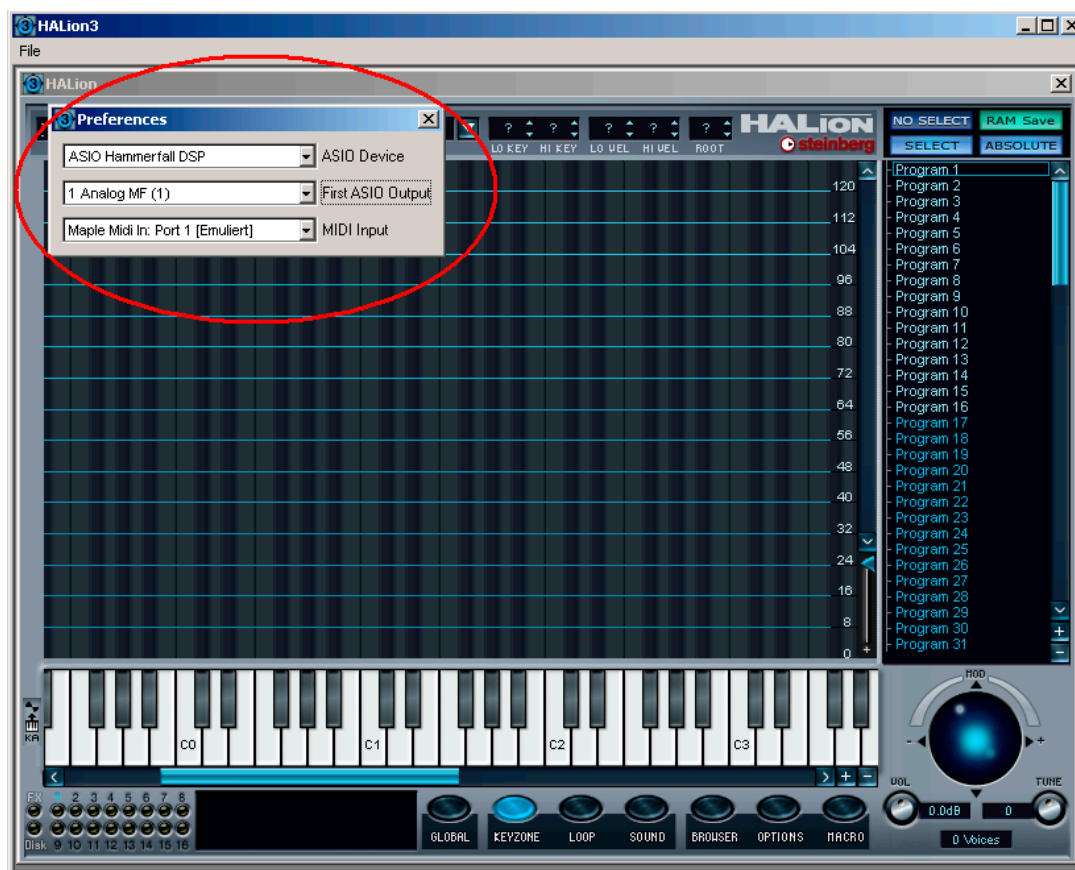

Learn more about the Performance Tool from the Performance Tool Manual.

Enjoy the sounds of the Vienna Symphonic Library!

Your Vienna Symphonic Library Team



Copyright Notice

Information in this training guide, including URL and other Web site references is subject to change without notice. Without limiting the rights under copyright, no part of this document may be reproduced, stored in or introduced into a retrieval system, or transmitted in any form, or by any means, or for any purpose, without the express written permission of the Vienna Symphonic Library GmbH.

18

Vienna Symphonic Library may have patents, patent applications, trademarks, or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from Vienna Symphonic Library, the furnishing of this document does not give you any license to these patents, trademarks, copyrights or any intellectual property.

Copyright © 2004 All rights reserved.
Vienna Symphonic Library GmbH.
Draschestrasse 89, A-1230 Wien, Austria
E-mail: office@vsl.co.at